

Introduction

The University Program Design Laboratory Package was designed to meet the needs of universities teaching digital logic design with state-of-the-art development tools and programmable logic devices (PLDs). The package provides all of the necessary tools for creating and implementing digital logic designs, including the following features:

- MAX+PLUS® II version 10.1 Student Edition development software
- UP Education Board
 - EPM7128S device in an 84-pin plastic J-lead chip carrier (PLCC) package
 - EPF10K20 device for the UP 1 board or an EPF10K70 device for the UP 1X board in a 240-pin power quad flat pack (RQFP) package
- ByteBlasterMV™ parallel port download cable

MAX+PLUS II Version 10.1 Student Edition Software

The MAX+PLUS II version 10.1 Student Edition software contains many of the features available in the commercial version of the MAX+PLUS II software, including a completely integrated design flow and an intuitive graphical user interface. This software supports schematic capture and text-based hardware description language (HDL) design entry, including the Altera® Hardware Description Language (AHDL™), VHDL, and Verilog HDL. It also provides design programming, compilation, and verification support for all devices supported by the MAX+PLUS II BASELINE software including the EPM7128S, EPF10K20 and EPF10K70 devices.

To maximize learning, the MAX+PLUS II software includes complete and instantly accessible on-line help. The student version of the MAX+PLUS II software can be freely distributed to students for installation on their personal computers.



For information on how to install the MAX+PLUS II version 10.1 Student Edition software on your computer, see “Software Installation” on page 17.

UP Education Board

The UP Education Board is a stand-alone experiment board based on two of Altera's leading device families: MAX[®] 7000 and FLEX[®] 10K. Its simple design, when used with the MAX+PLUS II software, provides a superior platform for learning digital logic design using high-level development tools and PLDs.

The UP Education Board was designed to meet the needs of the educator and the design laboratory environment. The UP Education Board supports both product-term based and look-up table (LUT)-based architectures and includes two PLDs. The EPM7128S device can be programmed in-system with the ByteBlasterMV download cable. The EPF10K20 and EPF10K70 devices can be configured in-system with either the ByteBlasterMV download cable or an EPC1 configuration device (not included).

EPM7128S Device

The EPM7128S device, a mid-density member of the high-density, high-performance MAX 7000S family, is based on EEPROM elements. The EPM7128S device comes in a socket-mounted 84-pin PLCC package and has 128 macrocells. Each macrocell has a programmable-AND/fixed-OR array as well as a configurable register with independently programmable clock, clock enable, clear, and preset functions. With a capacity of 2,500 gates and a simple architecture, the EPM7128S device is ideal for introductory designs as well as larger combinatorial and sequential logic functions.



For more information on MAX 7000 devices, go to the *MAX 7000 Programmable Logic Device Family Data Sheet*.

EPF10K20 Device

The EPF10K20 device, a member of Altera's high-density FLEX 10K family, is based on reconfigurable SRAM elements. The EPF10K20 device comes in a 240-pin RQFP package and has 1,152 logic elements (LEs) and 6 embedded array blocks (EABs). Each LE consists of a 4-input LUT, a programmable flipflop, and dedicated signal paths for carry and cascade functions. Each EAB provides 2,048 bits of memory, which can be used to create RAM, ROM, or first-in first-out (FIFO) functions. The EABs can also be used to implement logic functions, such as multipliers, microcontrollers, state machines, and digital signal processing (DSP) functions. With a typical gate count of 20,000 gates, the EPF10K20 device is ideal for introductory digital design courses.

EPF10K70 Device

The EPF10K70 device is based on reconfigurable SRAM elements. The EPF10K70 device is available in a 240-pin RQFP package and has 3,744 LEs and 9 EABs. Each LE consists of a 4-input LUT, a programmable flipflop, and dedicated signal paths for carry-and-cascade functions. Each EAB provides 2,048 bits of memory, which can be used to create RAM, ROM, or first-in first-out (FIFO) functions. EABs can also be used to implement logic functions, such as multipliers, microcontrollers, state machines and digital signal processing (DSP) functions. With a typical gate count of 70,000, the EPF10K70 device is ideal for intermediate to advanced digital design courses, including computer architecture, communications and DSP applications.



For more information on FLEX 10K devices, go to the *FLEX 10K Embedded Programmable Logic Family Data Sheet*.

ByteBlasterMV Parallel Port Download Cable

Designs can be easily and quickly downloaded into the UP Education Board using the ByteBlasterMV download cable, which is a hardware interface to a standard parallel port. This cable channels programming or configuration data between the MAX+PLUS II software and the UP Education Board. Because design changes are downloaded directly to the devices on the board, prototyping is easy and multiple design iterations can be accomplished in quick succession.




For more information on the ByteBlasterMV download cable, go to the *ByteBlasterMV Parallel Port Download Cable Data Sheet*.

UP Education Board Description

The UP Education Board contains the elements described in this section. [Figure 1](#) shows a block diagram of the UP Education Board.

Figure 1. UP Education Board Block Diagram

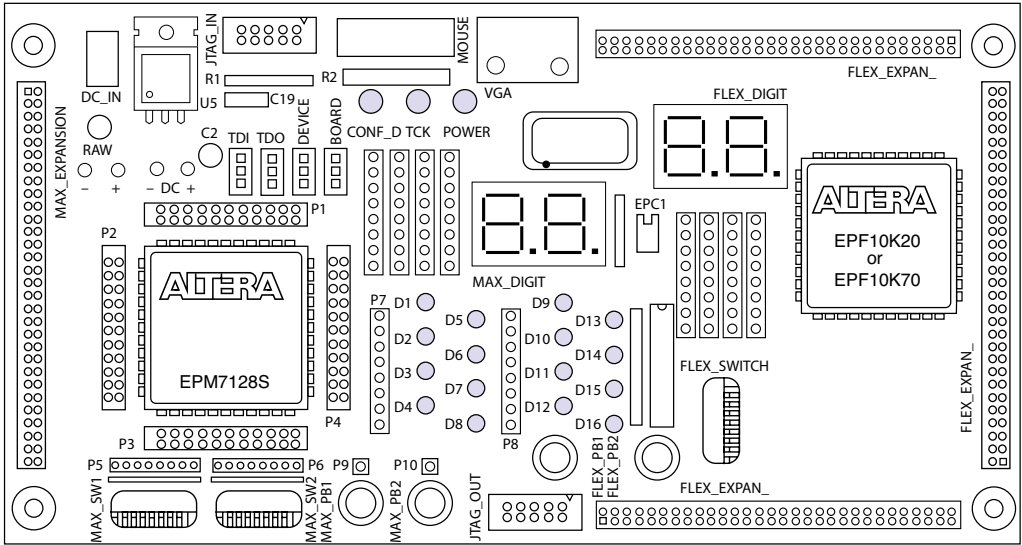

DC_IN & RAW Power Input

The DC_IN power input accepts a 2.5-mm × 5.55-mm female connector. The acceptable DC input is 7 to 9 V DC at a minimum of 350 mA. The RAW power input consists of two holes for connecting an unregulated power source. The hole marked with a plus sign (+) is the positive input; the hole marked with a minus sign (-) is board-common.

On-Board Voltage Regulator

The on-board voltage regulator, an LM340T, regulates the DC positive input at 5 V. The DC input consists of two holes for connecting a 5-V DC regulated power source. The hole marked with a plus sign (+) is the positive input; the hole marked with a minus sign (-) is board-common. A green light-emitting diode (LED) labeled POWER is illuminated when current is flowing from the 5-V DC regulated power source.

Oscillator

The UP Education Board contains a 25.175-MHz crystal oscillator. The output of the oscillator drives a global clock input on the EPM7128S device (pin 83) and a global clock input on the FLEX 10K device (pin 91).

JTAG_IN Header

The 10-pin female plug on the ByteBlasterMV download cable connects with the JTAG_IN 10-pin male header on the UP Education Board. The UP Education Board provides power and ground to the ByteBlasterMV download cable. Data is shifted into the devices via the TDI pin and shifted out of the devices via the TDO pin. Table 1 identifies the JTAG_IN pin names when the ByteBlasterMV is operating in Joint Test Action Group (JTAG) mode.

Pin	JTAG Signal
1	TCK
2	GND
3	TDO
4	VCC
5	TMS
6	No Connect
7	No Connect
8	No Connect
9	TDI
10	GND

Jumpers

The UP Education Board contains four three-pin jumpers (TDI, TDO, DEVICE, and BOARD) that set the JTAG configuration. You can set the JTAG chain for a variety of configurations (i.e., to program only the EPM7128S device, to configure only the FLEX 10K device, to configure and program both devices, or to connect multiple UP Education Boards together). Figure 2 shows the positions of the three connectors (C1, C2, and C3) on each of the four jumpers.

Figure 2. Position of C1, C2 & C3 Connectors

TDI	TDO	DEVICE	BOARD
C1	C1	C1	C1
C2	C2	C2	C2
C3	C3	C3	C3

Table 2 defines the settings for each configuration.

Table 2. JTAG Jumper Settings				
Desired Action	TDI	TDO	DEVICE	BOARD
Program EPM7128S device only	C1 & C2	C1 & C2	C1 & C2	C1 & C2
Configure FLEX 10K device only	C2 & C3	C2 & C3	C1 & C2	C1 & C2
Program/configure both devices (1)	C2 & C3	C1 & C2	C2 & C3	C1 & C2
Connect multiple boards together (2)	C2 & C3	OPEN	C2 & C3	C2 & C3

Notes:

- (1) The first device in the JTAG chain is the FLEX 10K device, and the second device is the EPM7128S device.
- (2) The first device in the JTAG chain is the FLEX 10K device, and the second device is the EPM7128S device. The last board in the chain must be set for a single board configuration (i.e., for programming only the EPM7128S device, configuring only the FLEX 10K device, or configuring/programming both devices). The last board cannot be set for connecting multiple boards together.

During configuration, the green CONF_D LED will turn off and the green TCK LED will modulate to indicate that data is transferring. After the device has successfully configured, the CONF_D LED will illuminate.



For information on how to program or configure EPM7128S, EPF10K20 or EPF10K70 devices, see “Programming or Configuring Devices” on page 18.

EPM7128S Device

The UP Education Board provides the following resources for the EPM7128S device.

- Socket-mounted 84-pin PLCC package
- Signal pins that are accessible via female headers
- JTAG chain connection for the ByteBlasterMV cable
- Two momentary push-button switches
- Two octal dual inline package (DIP) switches
- 16 LEDs
- Dual-digit seven-segment display
- On-board oscillator (25.175 MHz)
- Expansion port with 42 I/O pins and the dedicated global CLR, OE1, and OE2/GCLK2 pins

The pins from the EPM7128S device are not pre-assigned to switches and LEDs on the board, but are instead connected to female headers. With direct access to the pins, students can concentrate on design fundamentals and learn about the programmability of I/O pins and PLDs. After successfully compiling and verifying a design with the MAX+PLUS II software, students can easily connect the assigned I/O pins to the switches and LEDs using common hook-up wire. Students can then download their design into the device and compare their design's simulation to the actual hardware implementation.

EPM7128S Prototyping Headers

The EPM7128S prototyping headers are female headers that surround the device and provide access to the device's signal pins. The 21 pins on each side of the 84-pin PLCC package connect to one of the 22-pin, dual-row 0.1-inch female headers. The pin numbers for the EPM7128S device are printed on the UP Education Board; an "X" indicates an unassigned pin. Table 3 lists the pin numbers for the four female headers: P1, P2, P3, and P4. The power, ground, and JTAG signal pins are not accessible through these female headers.

P1		P2		P3		P4	
Outside	Inside	Outside	Inside	Outside	Inside	Outside	Inside
75	76	12	13	33	34	54	55
77	78	14	15	35	36	56	57
79	80	16	17	37	38	58	59
81	82	18	19	39	40	60	61
83	84	20	21	41	42	62	63
1	2	22	23	43	44	64	65
3	4	24	25	45	46	66	67
5	6	26	27	47	48	68	69
7	8	28	29	49	50	70	71
9	10	30	31	51	52	72	73
11	X	32	X	53	X	74	X

Note:

- (1) Inside refers to the row of female headers closest to the device; outside refers to the row of female headers furthest from the device.

MAX_PB1 & MAX_PB2 Push-Buttons

MAX_PB1 and MAX_PB2 are two push-buttons that provide active-low signals and are pulled-up through 10-KΩ resistors. Connections to these signals are easily made by inserting one end of the hook-up wire into the push-button female header. The other end of the hook-up wire should be inserted into the appropriate female header assigned to the I/O pin of the EPM7128S device.


MAX_SW1 & MAX_SW2 Switches

MAX_SW1 and MAX_SW2 each contain eight switches that provide logic-level signals. These switches are pulled-up through 10-KΩ resistors. Connections to these signals are easily made by inserting one end of the hook-up wire into the female header aligned with the appropriate switch. The other end of the hook-up wire should be inserted into the appropriate female header assigned to the I/O pin of the EPM7128S device. The switch output is set to logic 1 when the switch is open and set to logic 0 when the switch is closed.

D1 through D16 LEDs

The UP Education Board contains 16 LEDs that are pulled-up with a 330-Ω resistor. An LED is illuminated when a logic 0 is applied to the female header associated with the LED. LEDs D1 through D8 are connected in the same sequence to the female headers (i.e., D1 is connected to position 1, and D2 is connected to position 2, etc.). LEDs D9 through D16 are connected in the same sequence to the female headers (i.e., D9 is connected to position 1, and D10 is connected to position 2, etc.). See Figure 3.

Figure 3. LED Positions

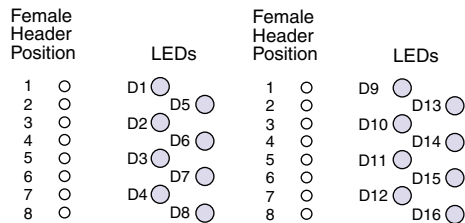

MAX_DIGIT Display

MAX_DIGIT is a dual-digit, seven-segment display connected directly to the EPM7128S device. Each LED segment of the display can be illuminated by driving the connected EPM7128S device I/O pin with a logic 0. Figure 4 shows the name of each segment.

Figure 4. Display Segment Name

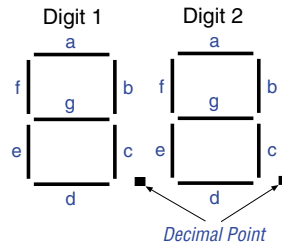


Table 4 lists the pin assignments for each segment.

Display Segment	Pin for Digit 1	Pin for Digit 2
a	58	69
b	60	70
c	61	73
d	63	74
e	64	76
f	65	75
g	67	77
Decimal point	68	79

MAX_EXPANSION

MAX_EXPANSION is a dual row of 0.1-inch spaced holes for accessing signal I/O pins and global signals on the EPM7128S device, power, and ground. Figure 5 shows the numbering convention for the holes.

Figure 5. MAX_EXPANSION Numbering Convention

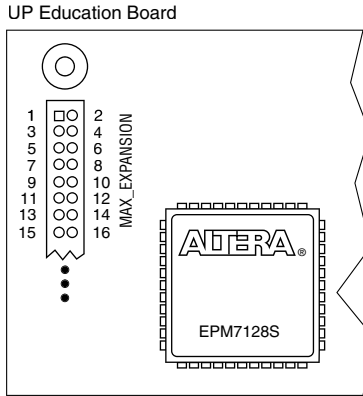


Table 5 lists the signal names and the EPM7128S device pins connected to each hole.

Table 5. MAX_EXPANSION Signal Names & Device Connections (Part 1 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
1	RAW	2	GND
3	VCC	4	GND
5	VCC	6	GND
7	No Connect	8	No Connect
9	No Connect	10	No Connect
11	No Connect	12	GCLRn/1
13	OE1/84	14	OE2/GCLK2/2
15	4	16	5
17	6	18	8
19	9	20	10
21	11	22	12
23	15	24	16
25	17	26	18
27	20	28	21
29	22	30	25
31	24	32	27
33	29	34	28
35	31	36	30
37	33	38	34

Table 5. MAX_EXPANSION Signal Names & Device Connections (Part 2 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
39	35	40	36
41	37	42	40
43	39	44	41
45	44	46	46
47	45	48	48
49	50	50	49
51	52	52	51
53	54	54	55
55	56	56	57
57	VCC	58	GND
59	VCC	60	GND

FLEX 10K Device

The UP Education Board provides the following resources for the FLEX 10K device. The pins from the FLEX 10K device are pre-assigned to switches and LEDs on the board.

- JTAG chain connection for the ByteBlasterMV cable
- Socket for an EPC1 configuration device
- Two momentary push button switches
- One octal DIP switch
- Dual-digit seven-segment display
- On-board oscillator (25.175 MHz)
- VGA port
- Mouse port
- Three expansion ports, each with 42 I/O pins and seven global pins

FLEX_PB1 & FLEX_PB2 Push-Buttons

FLEX_PB1 and FLEX_PB2 are two push buttons that provide active-low signals to two general-purpose I/O pins on the FLEX 10K device. FLEX_PB1 connects to pin 28, and FLEX_PB2 connects to pin 29. Each push button is pulled-up through a 10-K Ω resistor.

FLEX_SW1 Switches

FLEX_SW1 contains eight switches that provide logic-level signals to eight general-purpose I/O pins on the FLEX 10K device. An input pin is set to logic 1 when the switch is open and set to logic 0 when the switch is closed. Table 6 lists the pin assignment for each switch.

Table 6. FLEX_SW1 Pin Assignments

Switch	FLEX 10K Pin
FLEX_SWITCH-1	41
FLEX_SWITCH-2	40
FLEX_SWITCH-3	39
FLEX_SWITCH-4	38
FLEX_SWITCH-5	36
FLEX_SWITCH-6	35
FLEX_SWITCH-7	34
FLEX_SWITCH-8	33

FLEX_DIGIT Display

FLEX_DIGIT is a dual-digit, seven-segment display connected directly to the FLEX 10K device. Each LED segment on the display can be illuminated by driving the connected FLEX 10K device I/O pin with a logic 0. See [Figure 4 on page 9](#) for the name of each segment. [Table 7](#) lists the pin assignment for each segment.

Table 7. FLEX_DIGIT Segment I/O Connections

Display Segment	Pin for Digit 1	Pin for Digit 2
a	6	17
b	7	18
c	8	19
d	9	20
e	11	21
f	12	23
g	13	24
Decimal point	14	25

VGA Interface

The VGA interface allows the FLEX 10K device to control an external video monitor. This interface is composed of a simple diode-resistor network and a 15-pin D-sub connector (labeled VGA), where the monitor can plug into the UP Education Board. The diode-resistor network and D-sub connector are designed to generate voltages that conform to the VGA standard.

Information about the color, row, and column indexing of the screen is sent from the FLEX 10K device to the monitor via five signals. Three VGA signals are red, green, and blue, while the other two signals are horizontal and vertical synchronization. Manipulating these signals allows images to be written to the monitor's screen.

 See “VGA Driver Operation” on page 24 for details on how the VGA interface operates.

Table 8 lists the D-sub connector and the FLEX 10K device connections.

Signal	D-Sub Connector Pin	FLEX 10K Pin
RED	1	236
GREEN	2	237
BLUE	3	238
GND	6, 7, 8, 10, 11	–
HORIZ_SYNC	13	240
VERT_SYNC	14	239
No Connect	4, 5, 9, 15	–

Mouse Connector

The mouse interface, which consists of a 6-pin mini-DIN connector, allows the FLEX 10K device to receive data from a PS/2 mouse or a PS/2 keyboard. The UP Education Board provides power and ground to the attached mouse or keyboard. The FLEX 10K device outputs the DATA_CLOCK signal to the mouse and inputs the data signal from the mouse. Table 9 lists the signal names and the mini-DIN and FLEX 10K pin connections.


 See “Mouse Interface Operation” on page 27 for details on how the mouse interface operates.

Mouse Signal	Mini-DIN Pin	FLEX 10K Pin
MOUSE_CLK	1	30
MOUSE_DATA	3	31
VCC	5	–
GND	2	–

FLEX_EXPAN_A, FLEX_EXPAN_B & FLEX_EXPAN_C

FLEX_EXPAN_A, FLEX_EXPAN_B, and FLEX_EXPAN_C are dual rows of 0.1-inch spaced holes for accessing signal I/O pins and global signals on the FLEX 10K device, power, and ground. Figure 6 shows the numbering convention for these holes.

Figure 6. FLEX_EXPAN_A, FLEX_EXPAN_B & FLEX_EXPAN_C Numbering Convention

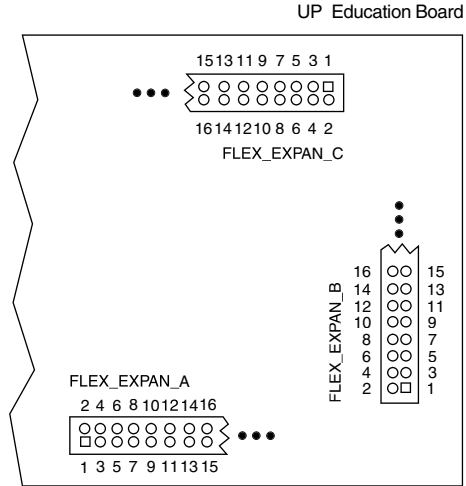

Tables 10 through 12 list the signal name and the FLEX 10K device pin connected to each hole.

Table 10. FLEX_EXPAN_A Signal Names & Device Connections (Part 1 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
1	RAW	2	GND
3	VCC	4	GND
5	VCC	6	GND
7	No Connect	8	DI1/90
9	DI2/92	10	DI3/210
11	DI4/212	12	DEV_CLR/209
13	DEV_OE/213	14	DEV_CLK2/211
15	45	16	46
17	48	18	49
19	50	20	51
21	53	22	54

Table 10. FLEX_EXPAN_A Signal Names & Device Connections (Part 2 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
23	55	24	56
25	61	26	62
27	63	28	64
29	65	30	66
31	67	32	68
33	70	34	71
35	72	36	73
37	74	38	75
39	76	40	78
41	79	42	80
43	81	44	82
45	83	46	84
47	86	48	87
49	88	50	94
51	95	52	97
53	98	54	99
55	100	56	101
57	VCC	58	GND
59	VCC	60	GND

Table 11. FLEX_EXPAN_B Signal Names & Device Connections (Part 1 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
1	RAW	2	GND
3	VCC	4	GND
5	VCC	6	GND
7	No Connect	8	DI1/90
9	DI2/92	10	DI3/210
11	DI4/212	12	DEV_CLR/209
13	DEV_OE/213	14	DEV_CLK2/211
15	109	16	110
17	111	18	113
19	114	20	115
21	116	22	117
23	118	24	119
25	120	26	126

Table 11. FLEX_EXPAN_B Signal Names & Device Connections (Part 2 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
27	127	28	128
29	129	30	131
31	132	32	133
33	134	34	136
35	137	36	138
37	139	38	141
39	142	40	143
41	144	42	146
43	147	44	148
45	149	46	151
47	152	48	153
49	154	50	156
51	157	52	158
53	159	54	161
55	162	56	163
57	VCC	58	GND
59	VCC	60	GND

Table 12. FLEX_EXPAN_C Signal Names & Device Connections (Part 1 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
1	RAW	2	GND
3	VCC	4	GND
5	VCC	6	GND
7	No Connect	8	DI1/90
9	DI2/92	10	DI3/210
11	DI4/212	12	DEV_CLR/209
13	DEV_OE/213	14	DEV_CLK2/211
15	175	16	181
17	182	18	183
19	184	20	185
21	186	22	187
23	188	24	190
25	191	26	192
27	193	28	194
29	195	30	196

Table 12. FLEX_EXPAN_C Signal Names & Device Connections (Part 2 of 2)

Hole Number	Signal/Pin	Hole Number	Signal/Pin
31	198	32	199
33	200	34	201
35	202	36	203
37	204	38	206
39	207	40	208
41	214	42	215
43	217	44	218
45	219	46	220
47	221	48	222
49	223	50	225
51	226	52	227
53	228	54	229
55	230	56	231
57	VCC	58	GND
59	VCC	60	GND

Software Installation

This section describes how to install the MAX+PLUS II version 10.1 Student Edition software for the Windows and Windows NT 4.0 operating systems.

After installation, students can register to obtain an authorization code via the Altera world-wide web site at the following URL:

<http://www.altera.com/support/licensing/lic-university.html>



For complete installation instructions, refer to the **read.me** file on the **MAX+PLUS II 10.1 Student Edition CD-ROM** or go to the **MAX+PLUS II Getting Started** manual.

Windows & Windows NT 4.0

Follow the steps shown below to install the MAX+PLUS II version 10.1 Student Edition software on your PC.

1. Insert the **MAX+PLUS II 10.1 Student Edition CD-ROM** into your CD-ROM drive.
2. Choose **Run** (Start menu).
3. Type: `<CD-ROM drive>:\mp2_101se.exe` and click **OK**. You are guided through the installation procedure.

Programming or Configuring Devices

Programming or configuring the devices on the UP Education Board requires setting the on-board jumpers and the JTAG programming options in the MAX+PLUS II software, and connecting the ByteBlasterMV download cable to the PC's parallel port and to the JTAG_IN connector on the UP Education Board. This section describes how to set these options to perform the following actions:

- Program only the EPM7128S device
- Configure only the EPF10K20 or EPF20K70 device
- Configure/program both devices
- Connect multiple UP Education Boards together in a chain


EPM7128S Programming

This section describes the procedures for programming only the EPM7128S device, (i.e., how to set the on-board jumpers, connect the ByteBlasterMV download cable, and set options in the MAX+PLUS II software).

Setting the On-Board Jumpers for EPM7128S Programming

To program only the EPM7128S device in a JTAG chain, set the jumpers TDI, TDO, DEVICE, and BOARD as shown in [Figure 7](#).

Figure 7. Jumper Settings for Programming Only the EPM7128S Device

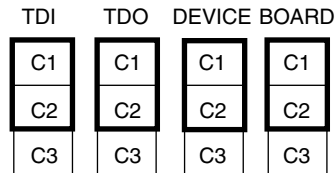

Connecting the ByteBlasterMV Download Cable for EPM7128S Programming

Attach the ByteBlasterMV cable directly to the PC's parallel port and to the JTAG_IN connector on the UP Education Board. For more information on setting up the ByteBlasterMV cable, go to the [ByteBlasterMV Parallel Port Download Cable Data Sheet](#).

Setting the JTAG Options in MAX+PLUS II for EPM7128S Programming

The following steps describe how to use the MAX+PLUS II software to program the EPM7128S device in a JTAG chain. For more information on how to use the MAX+PLUS II software, see MAX+PLUS II Help.

1. Turn on the **Multi-Device JTAG Chain** command (JTAG menu) in the MAX+PLUS II Programmer to program a device. Follow this procedure even if you are only programming one device.
2. Choose **Multi-Device JTAG Chain Setup** (JTAG menu).
3. Select **EPM7128S** in the **Device Name** drop-down list box in the **Multi-Device JTAG Chain Setup** dialog box.
4. Type the name of the programming file for the EPM7128S device in the **Programming File Name** box. The **Select Programming File** button can also be used to browse your computer's directory structure to locate the appropriate programming file.
5. Click **Add** to add the device and associated programming file to the **Device Names & Programming File Names** box. The number to the left of the device name shows the order of the device in the JTAG chain. The device's associated programming file is displayed on the same line as the device name. If no programming file is associated with a device, "<none>" is displayed next to the device name.
6. Click **Detect JTAG Chain Info** to have the ByteBlasterMV cable check the device count, JTAG ID code, and total instruction length of the JTAG chain. A message just above the **Detect JTAG Chain Info** button reports the information detected by the ByteBlasterMV cable. You must manually verify that this message matches the information in the **Device Names & Programming File Names** box.
7. Click **Save JCF**. In the **Save JCF** dialog box, type the name of the file in the **File Name** box and then select the desired directory in the **Directories** box to save the current settings to a JTAG Chain File (.jcf) for future use. Click **OK**.
8. Click **OK** to save your changes.
9. Click **Program** in the MAX+PLUS II Programmer.


EPF10K20 & EPF10K70 Configuration

This section describes the procedures for configuring only the EPF10K20 or EPF10K70 devices, (i.e., how to set the on-board jumpers, connect the ByteBlasterMV download cable, and set options in the MAX+PLUS II software).

Setting the On-Board Jumpers for EPF10K20 or EPF10K70 Configuration

To configure only the EPF10K20 or EPF10K70 device in a JTAG chain, set the jumpers TDI, TDO, DEVICE, and BOARD as shown in [Figure 8](#).

Figure 8. Jumper Settings for Configuring Only the FLEX 10K Device

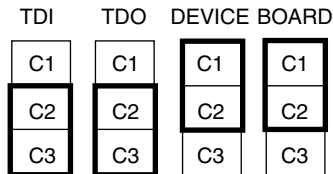

Connecting the ByteBlasterMV Download Cable for EPF10K20 or EPF10K70 Configuration

Attach the ByteBlasterMV cable directly to the PC's parallel port and to the JTAG_IN connector on the UP Education Board. For more information on setting up the ByteBlasterMV cable, go to the [ByteBlasterMV Parallel Port Download Cable Data Sheet](#).

Setting the JTAG Options in the MAX+PLUS II Software for EPF10K20 or EPF10K70 Configuration

The following steps describe how to use the MAX+PLUS II software to configure the EPF10K20 or EPF10K70 device in a JTAG chain. For more information on how to configure a device, see MAX+PLUS II Help.

1. Turn on the **Multi-Device JTAG Chain** command (JTAG menu) in the MAX+PLUS II Programmer to configure the EPF10K20 or EPF10K70 devices. Follow this step even if you are only programming one device.
2. Choose **Multi-Device JTAG Chain Setup** (JTAG menu).
3. Select **EPF10K20 or EPF10K70** in the **Device Name** drop-down list box in the **Multi-Device JTAG Chain Setup** dialog box.
4. Type the name of the programming file for the EPF10K20 or EPF10K70 device in the **Programming File Name** box. The **Select Programming File** button can also be used to browse your computer's directory structure to locate the appropriate programming file.

5. Click **Add** to add the device and associated programming file to the **Device Names & Programming File Names** box. The number to the left of the device name shows the order of the device in the JTAG chain. The device's associated programming file is displayed on the same line as the device name. If no programming file is associated with a device, "<none>" is displayed next to the device name.
6. Click **Detect JTAG Chain Info** to have the ByteBlasterMV cable check the device count, JTAG ID code, and total instruction length of the JTAG chain. A message just above the **Detect JTAG Chain Info** button reports the information detected by the ByteBlasterMV cable. You must manually verify that this message matches the information in the **Device Names & Programming File Names** box.
7. Click **Save JCF** to save the current settings to a JCF for future use. Type the name of the file in the **File Name** box and then select the desired directory in the **Directories** box in the **Save JCF** dialog box. Click **OK**.
8. Click **OK** to save your changes.
9. Click **Configure** in the MAX+PLUS II Programmer.


Configure/Program Both Devices

This section describes the procedures for configuring/programming both the FLEX 10K and EPM7128S devices in a JTAG chain, (i.e., how to set the on-board jumpers, connect the ByteBlasterMV download cable, and set options in the MAX+PLUS II software).

Setting the On-Board Jumpers for Configuring/Programming Both Devices

To configure and program the FLEX 10K and EPM7128S devices in a multi-device JTAG chain, set the jumpers TDI, TDO, DEVICE, and BOARD as shown in [Figure 9](#).

Figure 9. Jumper Settings for Configuring/Programming Both Devices

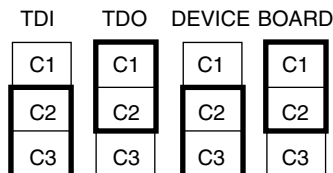

Connecting the ByteBlasterMV Download Cable for Configuring & Programming Both Devices

Attach the ByteBlasterMV cable directly to the PC's parallel port and to the JTAG_IN connector on the UP Education Board. For more information on setting up the ByteBlasterMV cable, go to the *ByteBlasterMV Parallel Port Download Cable Data Sheet*.

Setting the JTAG Options in the MAX+PLUS II Software for Configuring & Programming Both Devices

The following steps describe how to use the MAX+PLUS II software to configure and program both devices in a multi-device JTAG chain. For more information on how to program or configure a device, see MAX+PLUS II Help.

1. Turn on the **Multi-Device JTAG Chain** command (JTAG menu).
2. Choose **Multi-Device JTAG Chain Setup** (JTAG menu).
3. Select the first target device name in the **Device Name** drop-down list box in the **Multi-Device JTAG Chain Setup** dialog box.
4. Type the name of the programming file for the device listed in the **Device Name** box in the **Programming File Names** box. The **Select Programming File** button can also be used to browse your computer's directory structure to locate the appropriate programming file.
5. Click **Add** to add the device and associated programming file to the **Device Names & Programming File Names** box. The number to the left of the device name shows the device's order in the JTAG chain. The device's associated programming file is displayed on the same line as the device name. If no programming file is associated with a device, "<none>" is displayed next to the device name.
6. Repeat steps 3 through 5 to add information for each device in the JTAG chain.
7. Click **Detect JTAG Chain Info** to have the ByteBlasterMV cable check the device count, JTAG ID code, and total instruction length of the multi-device JTAG chain. A message just above the **Detect JTAG Chain Info** button reports the information detected by the ByteBlasterMV cable. You must manually verify that this message matches the information in the **Device Names & Programming File Names** box.

8. Click **Save JCF** to save the current settings to a JCF for future use. Type the name of the file in the **File Name** box and then select the desired directory in the **Directories** box. Click **OK**.
9. Click **OK** to save the changes.
10. Click **Configure** in the MAX+PLUS II Programmer to configure all FLEX 10K devices in the JTAG chain. Then, click **Program** to program all EPM7128S devices in the JTAG chain.

Connect Multiple UP Education Boards Together in a Chain

This section describes the procedures for connecting multiple UP Education Boards together, (i.e., how to set the on-board jumpers, connect the ByteBlasterMV download cable, and set options in the MAX+PLUS II software).

Setting the On-Board Jumpers for Connecting Multiple UP Education Boards Together

To configure/program EPM7128S and FLEX 10K devices on multiple UP Education Boards connected in a multi-device JTAG chain, set the jumpers TDI, TDO, DEVICE, and BOARD for all boards except the last board in the chain as shown in [Figure 10](#).

Figure 10. Jumper Settings for All Boards Except the Last Board in the Chain

TDI	TDO	DEVICE	BOARD
C1	C1	C1	C1
C2	C2	C2	C2
C3	C3	C3	C3

The last UP Education Board in the chain can configure and program one or both devices. However, the BOARD jumper must be set as shown in [Figure 11](#).

Figure 11. Jumper Settings for the Last Board in the Chain

The TDI, TDO, and DEVICE settings depend on which configuration you use.

TDI	TDO	DEVICE	BOARD
C1	C1	C1	C1
C2	C2	C2	C2
C3	C3	C3	C3

Connecting the ByteBlasterMV Download Cable for Connecting Multiple UP Education Boards Together

Attach the ByteBlasterMV cable directly to your PC’s parallel port and to the JTAG_IN connector on the UP Education Board.



For more information on setting up the ByteBlasterMV cable, go to the *ByteBlasterMV Parallel Port Download Cable Data Sheet*.


Setting the JTAG Options in the MAX+PLUS II Software for Connecting Multiple UP Education Boards Together

For information on how to set the JTAG options in the MAX+PLUS II software, see “[Setting the JTAG Options in the MAX+PLUS II Software for Configuring & Programming Both Devices](#)” on page 22.

VGA Driver Operation

A standard VGA monitor consists of a grid of pixels that can be divided into rows and columns. A VGA monitor typically contains 480 rows, with 640 pixels per row, as shown in [Figure 12](#). Each pixel can display various colors, depending on the state of the red, green, and blue signals.

Figure 12. VGA Monitor

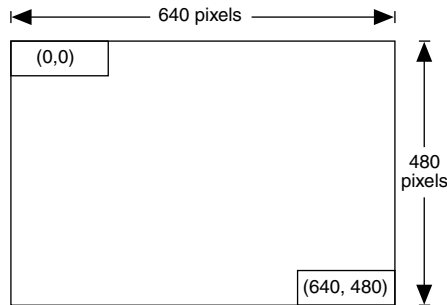


Each VGA monitor has an internal clock that determines when each pixel is updated. This clock operates at the VGA-specified frequency of 25.175 MHz. The monitor refreshes the screen in a prescribed manner that is partially controlled by the horizontal and vertical synchronization signals. The monitor starts each refresh cycle by updating the pixel in the top left-hand corner of the screen, which can be treated as the origin of an X-Y plane (see Figure 12). After the first pixel is refreshed, the monitor refreshes the remaining pixels in the row. When the monitor receives a pulse on the horizontal synchronization, it refreshes the next row of pixels. This process is repeated until the monitor reaches the bottom of the screen. When the monitor reaches the bottom of the screen, the vertical synchronization pulses, causing the monitor to begin refreshing pixels at the top of the screen (i.e., at [0,0]).

VGA Timing


For the VGA monitor to work properly, it must receive data at specific times with specific pulses. Horizontal and vertical synchronization pulses must occur at specified times to synchronize the monitor while it is receiving color data. Figures 13 and 14 show the timing waveforms for the color information with respect to the horizontal and vertical synchronization signals.

Figure 13. Horizontal Refresh Cycle

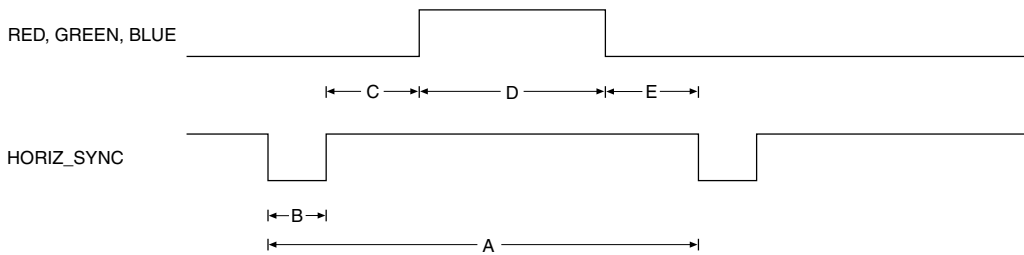

Parameters	A	B	C	D	E
Time	31.77 μs	3.77 μs	1.89 μs	25.17 μs	0.94 μs

Figure 14. Vertical Refresh Cycle

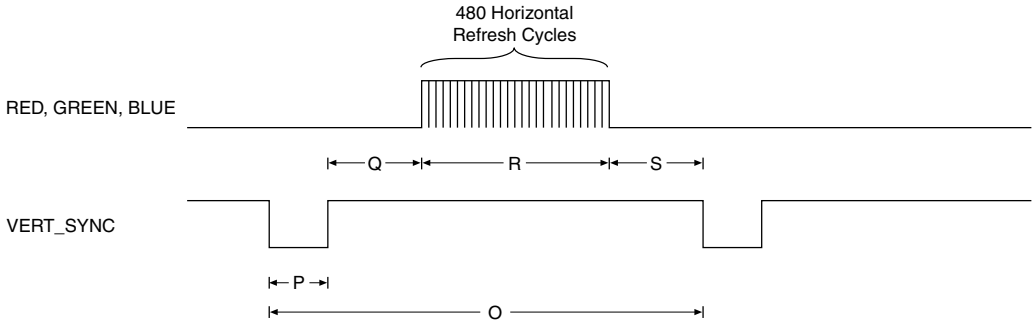

Parameters	O	P	Q	R	S
Time	16.6 ms	64 μ s	1.02 ms	15.25 ms	0.35 ms

The frequency of operation and the number of pixels that the monitor must update determines the time required to update each pixel, and the time required to update the whole screen. The following equations roughly calculate the time required for the monitor to perform all of its functions.

$$T_{\text{pixel}} = 1/f_{\text{CLK}} = 40 \text{ ns}$$

$$T_{\text{ROW}} = A = B + C + D + E = (T_{\text{pixel}} \times 640 \text{ pixels}) + \text{row} + \text{guard bands} = 31.77 \mu\text{s}$$

$$T_{\text{screen}} = O = P + Q + R + S = (T_{\text{ROW}} \times 480 \text{ rows}) + \text{guard bands} = 16.6 \text{ ms}$$

- Where:
- T_{pixel} = Time required to update a pixel
 - f_{CLK} = 25.175 MHz
 - T_{ROW} = Time required to update one row
 - T_{screen} = Time required to update the screen
 - B, C, E = Guard bands
 - P, Q, S = Guard bands

The monitor writes to the screen by sending red, green, blue, horizontal synchronization, and vertical synchronization signals when the screen is at the expected location. Once the timing of the horizontal and vertical synchronization signals is accurate, the monitor only needs to keep track of the current location, so it can send the correct color data to the pixel.

Mouse Interface Operation

You can connect a mouse to the UP Education Board via the 6-pin mini-DIN connector. The data is sent using a synchronous serial protocol, and the transmission is controlled by the CLK and DATA signals. During non-transmission, CLK is at logic 1 and DATA can be either logic 0 or logic 1.

Each transmission contains one start bit, eight data bits, odd parity, and one stop bit. Data transmission starts from the least significant bit (LSB), i.e., the sequence of transmission is start bit, DATA0 through DATA7, parity, stop bit. Start bits are logic 0, and stop bits are logic 1. Each clock period is 30 to 50 μ sec; the data transition to the falling edge of the clock is 5 to 25 μ sec. Table 13 shows the data packet format.

Table 13. Data Packet Format Note (1)

Packet Number	D7	D6	D5	D4	D3	D2	D1	D0
1	YV	XV	YS	XS	1	0	R	L
2	X7	X6	X5	X4	X3	X2	X1	X0
3	Y7	Y6	Y5	Y4	Y3	Y2	Y1	Y0

Note:

- (1) Where: L = Left button state (1 = left mouse button is pressed down)
 R = Right button state (1 = right mouse button is pressed down)
 X0 – X7 = Movement in X direction
 Y0 – Y7 = Movement in Y direction
 XS, YS = Movement data sign (1 = negative)
 XV, YV = Movement data overflow (1 = overflow has occurred)

The mouse operates on a Cartesian coordinate system (i.e., moving to the right is positive, moving to the left is negative, moving up is positive, and moving down is negative). The magnitude of the movement is a function of the mouse's rate of movement. The faster the mouse moves, the greater the magnitude.

Revision History

The information contained in the *University Program Design Laboratory Package User Guide* version 1.1 supersedes information published in previous versions.

Version 1.1 Changes

Version 1.1 contains the following changes:

- Updated references for the ByteBlaster download cable to the ByteBlasterMV download cable
- Added information about the EPF10K70 device

- Text changes were made to reflect current MAX+PLUS II and Windows software versions

Version 1.02 Changes

Version 1.02 contains the following changes:

- Text changes were made to reflect current MAX+PLUS II and Windows software versions.
- Installation instructions for Windows 3.1 and Windows NT 3.51 were removed.
- Table 5 was updated to reflect correct labels for holes 30, 31, 33-36, 42, 43, 46, 47, and 49-52.

Version 1.01 Changes

Version 1.01 contains the following changes:

- Tables 10, 11, and 12 were updated to reflect correct labels for Hole 8.
- Table 12 was updated to reflect the correct pin number for Hole 32.



101 Innovation Drive
San Jose, CA 95134
(408) 544-7000
<http://www.altera.com>
University Program:
university@altera.com
Literature Services:
(888) 3-ALTERA
lit_req@altera.com

Altera, MAX, MAX+PLUS, MAX+PLUS II, MAX 7000S, EPM7128S, FLEX, FLEX 10K, EPF10K20, EPF10K70, ByteBlasterMV, EPC1, and AHDL are trademarks and/or service marks of Altera Corporation in the United States and other countries. Altera acknowledges the trademarks of other organizations for their respective products or services mentioned in this document. Altera products are protected under numerous U.S. and foreign patents and pending applications, maskwork rights, and copyrights. Altera warrants performance of its semiconductor products to current specifications in accordance with Altera's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Altera assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Altera Corporation. Altera customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.

Copyright © 2001 Altera Corporation. All rights reserved.

